



**IM-Mountings** are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.

Load Capacity: 400 to 3500 N



Applications: marine propulsion-engines, generator sets, pump units, compressor sets, cooling units, etc.

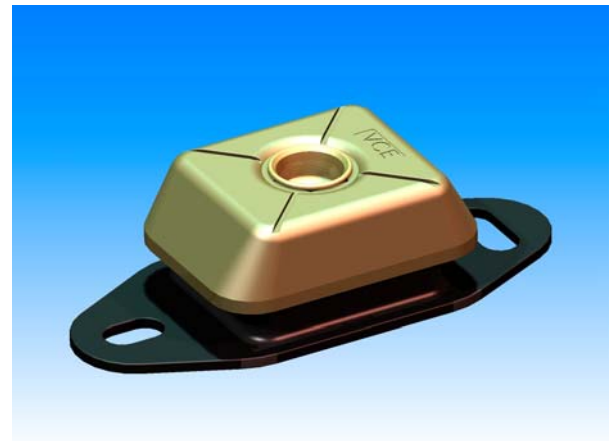

SIDEVIEW

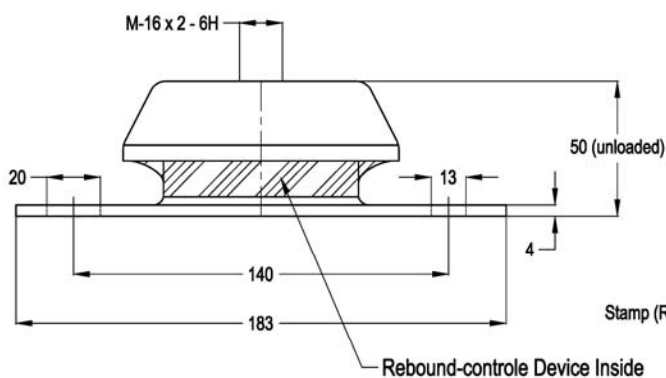

TOPVIEW

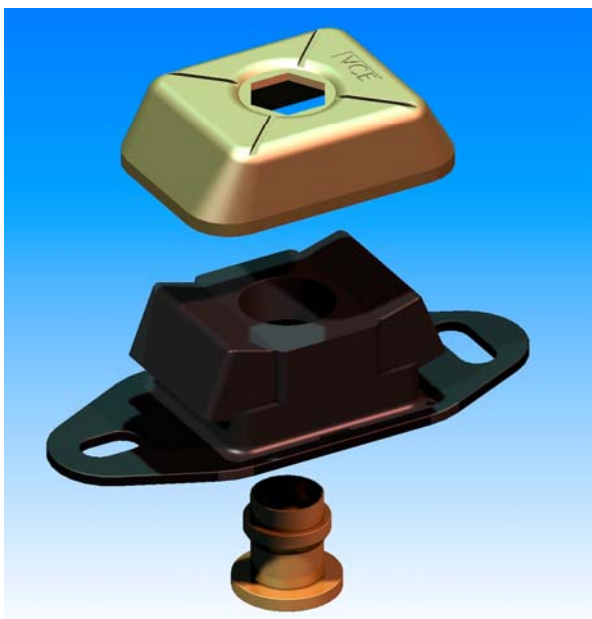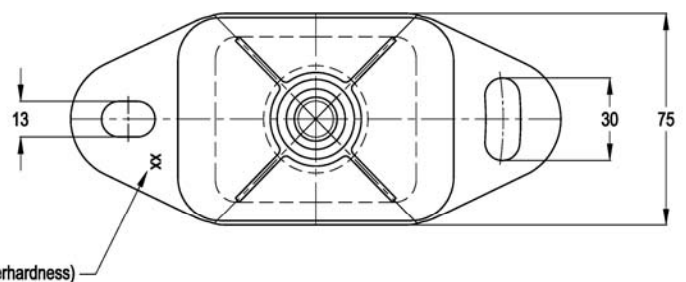

LOAD CHARACTERISTICS

