



IM-Mountings are very suitable for mobile applications. These relative soft and compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.

Load Capacity: 500 to 4500 N



Applications: (non-thrust) marine propulsion-engines, generator sets, pump units, compressor sets, etc.

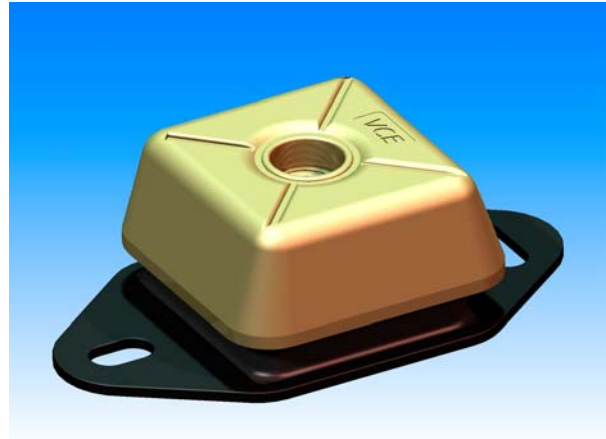

SIDE-VIEW

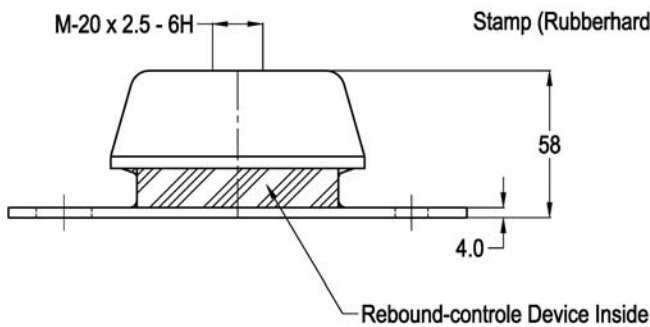

TOP-VIEW

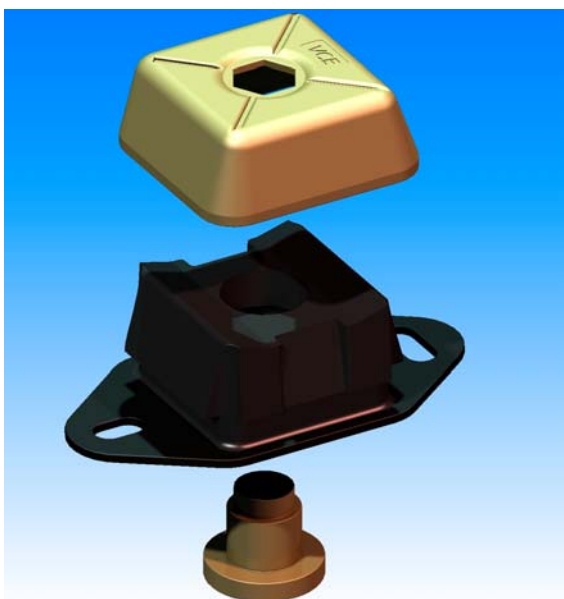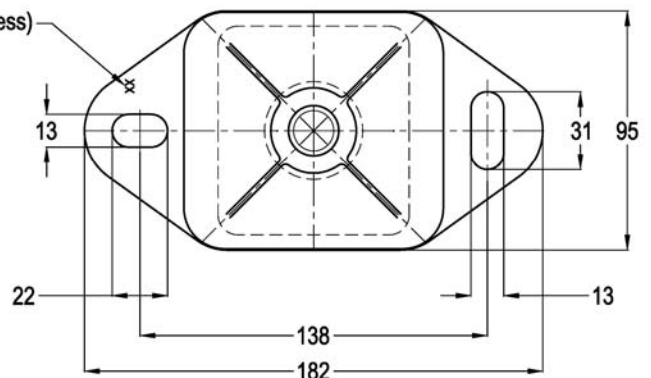

LOAD CHARACTERISTICS

